

EB30CS2R-AN

Composite Codec emSFP™ Coaxial
Dual Receiver, Non-MSA, DIN 1.0/2.3

Features

- SMPTE 259M-C compliant
- DIN 1.0/2.3 connectors (75Ω)
- Supported Composite Standards:
 - NTSC M, NTSC J, NTSC 4.43
 - PAL B/G/H/I/D, PAL M, PAL N, PAL 60
- Rx Channel:
 - 10-bit Composite to SD-SDI video decoder
 - 4x Oversampling (54Mhz)
 - Test Pattern Generation
- Control via serial interface including:
 - Voltage & Temperature Monitoring
 - Module Information
 - Analog Status and Control registers
- Low Power Consumption - typical 1027mW
- Single Supply +3.3V
58.5mm x 13.4mm x 8.6mm SFP Package

Summary of Benefits

- **Flexibility:** Build a totally optimized system by mixing electrical SDI, NTSC/PAL converter and optical video SFP;
- **Cost:** Design cost effective system;
- **Modularity:** Allow hot scalability and replacement of critical components wherever possible;
- **Density:** Highest density ever achieved for standard 75Ω coaxial SDI interfaces combined with converters;
- **Time-to-market:** Reduce development cost and risk;
- **Interchangeable:** Fully compatible with existing Non-MSA video optical SFP and SDI emSFP™;
- **Hot-Pluggable:** Swap without affecting system behaviour;
- **Advanced Packaging:** Support ganged cages, belly-to-belly and superposed cages mounting;
- **Inventory:** Just in time inventory management;
- **Green:** The EB30CS2R-AN is Pb-free and ROHS compliant.

Applications


- Low cost video converters replacement
- Distribution amplifier
- Processing cards
- Video routers
- Multiviewers

Overview

The EB30CS2R-AN is an electrical emSFP™ transceiver module designed to decode two composite signals over 75Ω coaxial cables via HD-BNC™ connectors. The module decodes NTSC/PAL composite inputs and convert to SD-SDI signal.

The EB30CS2R-AN provides module identification information, configuration and diagnostic monitoring through a two wire serial interface. It is also a hot-pluggable solution for field system upgrade and maintenance.

The EB30CS2R-AN is interchangeable with other non-MSA optical video SFP or coaxial emSFP™ improving product flexibility. Ganged cages, belly-to-belly and superposed cages mounting are supported. The module is SMPTE compliant resulting in quick time-to-market and reduced development effort and cost. The EB30CS2R-AN is Pb-free and ROHS compliant.

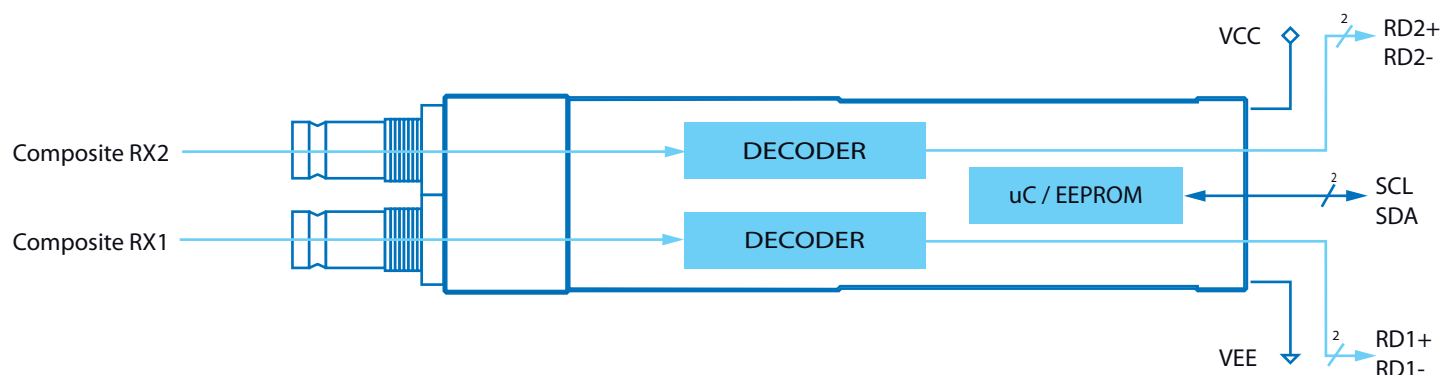

Related Products

| Part Number | Type (CVBS) | Pinout | Package | Temperature Range |
|--------------|---------------------------------|---------|---------|-------------------|
| EB30CSRT-AM | Rx/Tx | MSA | SFP | 0°C to 65°C |
| EB30CSRT-AN | Rx/Tx | Non-MSA | SFP | 0°C to 65°C |
| EB30CS2T-AN | 2Tx | Non-MSA | SFP | 0°C to 65°C |
| EB00CA01-xxA | DIN1.0/2.3 to BNC cable adaptor | | | |



sales@embrionix.com